

# S-1450 Intermediate ring

11-02/1039001301/03.2007 **11**

Page 1 of 1

## Application and features

- Application: Water, sea water and sewage
- To be mounted between flanges




## Technical description

- Max. working pressure: PN 16
- Max. temperature: 130°
- Face-to-face length: See table
- Coating: Epoxy minimum 250 µm
- Product colour: Blue, NCS 3070 R90 B
- Material: Ductile iron GGG40

## References and dimensions

DN mm	D mm	d mm	H mm	L mm	Weight kg	Esco no.	NRF no.
100	158	G 1½	50	160	4	14500100	563 5609
150	212	G 1½	50	190	7	14500150	563 5613
200	268	G 2	70	220	11	14500200	563 5616
250	320	G 2½	84	260	20	14500250	563 5619
300	370	G 2½	84	280	22	14500300	563 5623

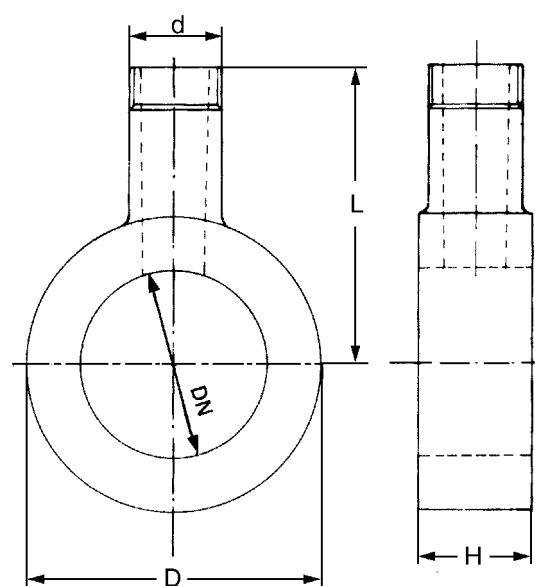

Kongsberg Esco AS can accept no responsibility for possible errors in catalogues, brochures and other printed material. Kongsberg Esco AS reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Kongsberg Esco and the Kongsberg Esco logotype are trademarks of Kongsberg Esco AS. All rights reserved.