

S-2650/S-2750 Adjustable distance piece

PF/F4

11-05/1039002021/03.2007 **11**

Page 1 of 2

Application and features

- Application: Water and sewage
- Adjustable lengths in both directions
- Easy assembling due to short bolts



Technical description

- Pressure class S-2650: PN 10
- Pressure class S-2750: PN 16
- Max. working temperature: 70°C
- Face-to-face length: See table
- Surface treatment: Epoxy minimum. 250 µm

Material specification

- Outer pipe, inner pipe and gland: Steel
- Gasket: EPDM
- Bolts S-2650/S-2750: Electro galvanized (yellow)
- Bolts S-2650-4/S-2750-4: Hot-dipped galvanized

Dimensions

S-2650/S-2650-4 PN 10

DN mm	L mm	+/- V mm	Bolt size	B mm	No. of tierods	Weight kg
50	300	25	M16	250	4	15
65	300	25	M16	250	4	18
80	300	25	M16	250	8	22,5
100	300	25	M16	250	8	28
125	300	25	M16	250	8	34
150	350	25	M20	290	8	48
200	350	25	M20	290	8	64
250	350	25	M20	290	12	88
300	350	25	M20	290	12	103
350	350	25	M20	290	16	125
400	375	25	M24	320	16	160
500	375	25	M24	320	20	198
600	400	25	M27	340	20	268
700	400	25	M27	340	24	335
800	450	25	M30	380	24	455

S-2750/S-2750-4 PN 16

DN mm	L mm	+/- V mm	Bolt size	B mm	No. of tierods	Weight kg
200	350	25	M20	290	12	66
250	375	25	M24	320	12	96
300	375	25	M24	320	12	115
350	425	25	M24	350	16	160
400	425	25	M27	350	16	204
500	450	25	M30	380	20	305
600	475	25	M33	400	20	415
700	475	25	M33	400	24	445
800	525	25	M36	450	24	610

Kongsberg Esco AS can accept no responsibility for possible errors in catalogues, brochures and other printed material. Kongsberg Esco AS reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Kongsberg Esco and the Kongsberg Esco logotype are trademarks of Kongsberg Esco AS. All rights reserved.

S-2650/S-2750 Adjustable distance piece

PF/F4


11-05/1039002021/03.2007 **11**

Page 2 of 2

References

S-2650 Electro galvanized bolts

DN mm	Esco no.
50	26500050
65	26500065
80	26500080
100	26500100
125	26500125
150	26500150
200	26500200
250	26500250
300	26500300
350	26500350
400	26500400
500	26500500
600	26500600
700	26500700
800	26500800
900	26500900
1000	26501000

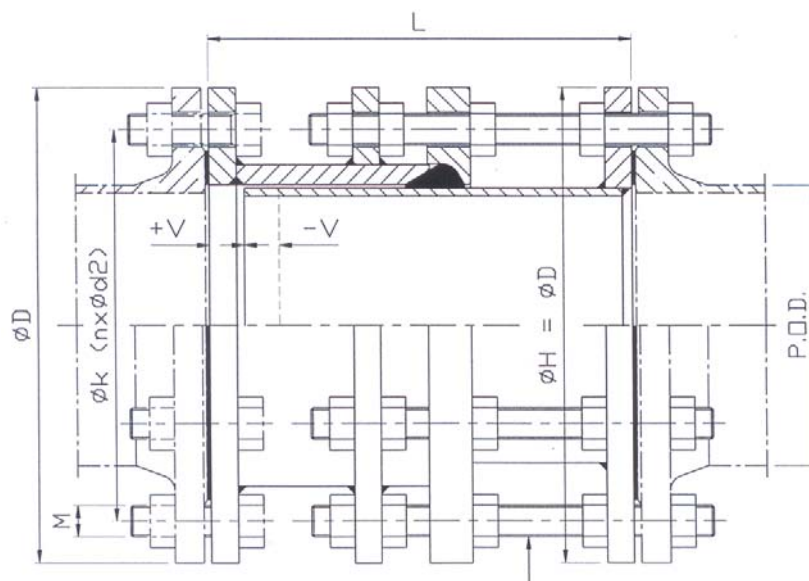

S-2650-4 Hot-dipped galvanized bolts

DN mm	Esco no.
50	26504050
65	26504065
80	26504080
100	26504100
125	26504125
150	26504150
200	26504200
250	26504250
300	26504300
350	26504350
400	26504400
500	26504500
600	26504600
700	26504700
800	26504800
900	26504900

S-2750 Electro galvanized bolts

DN mm	Esco no.
200	27500200
250	27500250
300	27500300
350	27500350
400	27500400
500	27500500
600	27500600
700	27500700
800	27500800
900	27500900

S-2750-4 Hot-dipped galvanized bolts

DN mm	Esco no.
200	27504200
250	27504250
300	27504300
350	27504350
400	27504400
500	27504500
600	27504600
700	27504700
800	27504800
900	27504900